

EKKO®

Material Handling Equipment

**MOVING
AHEAD**

CATALOG



www.ekkolifts.com

Table of Contents

| | |
|--|----|
| About US | 3 |
| FORKLIFTS | |
| EK15A 3 Wheel Electric Forklift | 4 |
| EK13A 3 Wheel Electric Forklift | 5 |
| STACKERS | |
| EH15TH Walkie Reach Truck | 6 |
| EH15T Walkie Reach Truck | 7 |
| EK13-130 Counterbalance Walkie Stacker | 8 |
| EK13 Counterbalance Walkie Stacker | 9 |
| EK07S Counterbalance Walkie Stacker | 10 |
| EB20E Full Powered Walkie Straddle Stacker | 11 |
| EB18E Full Powered Walkie Straddle Stacker | 12 |
| EB12E-138 Full Powered Walkie Straddle Stacker | 13 |
| EB12E Full Powered Walkie Straddle Stacker | 14 |
| EA15B Semi-Electric Straddle Stacker | 15 |
| EA15A Semi-Electric Straddle Stacker | 16 |
| D10 Manual Straddle Stacker | 17 |
| PALLET JACKS | |
| EP25E Electric Pallet Jack | 18 |
| EP20E Electric Pallet Jack | 19 |
| EP20D Electric Pallet Jack | 20 |
| EP18D Electric Pallet Jack | 21 |
| A25 Manual Pallet Jack | 22 |
| A20 Manual Pallet Jack | 23 |
| SCISSOR LIFT TABLE CARTS | |
| T15 Scissor Lift Cart | 24 |
| T50 Heavy Duty Scissor Lift Cart | 25 |
| T35 Dual Scissor Lift Cart | 26 |
| TOW TRACTOR | |
| EG30 Full Powered Tow Tractor | 27 |

About Us

Since 2008, EKKO Material Handling Equipment Manufacturing Inc. has become the go to manufacturer for the OEM and ODM channel. Due to our experience, innovative manufacturing capabilities, design, and our collaborations internationally, we have created enormous success with our partners in supplying them with nothing but quality forklifts, pallet trucks, walkie pallet trucks, end-control rider pallet trucks, stackers, walkie stackers, reach trucks, and many other material handling equipment.

With our strict research and development, quality control, and quality assurance departments, every product has and will continue to pass CE certification with international safety standards and ISO9001 Certification. In addition, our products have acquired self-managed import and export rights throughout North and South America, Europe, and Asia.

OEM and ODM channels are welcomed. Furthermore, non-standard equipment is capable for production according to the customer's specifications and requirements. EKKO insists on the operating theory of "Services Create Enterprise Value", offering you top-ranking quality and professional after-service.

- **Superior Quality**
- **Reliability**
- **Versatility**
- **Advanced Engineering**
- **Competitive Pricing**
- **ISO Certified**
- **CE Certified**
- **Superior Support**
- **3 Years Warranty**




3 Wheel Electric Forklift

| Model | | EK15A |
|--|--------|------------------|
| Lift | | Electric |
| Drive | | Electric |
| Load capacity | (lbs) | 3300 |
| Load center distance | (in) | 24 |
| Wheel base | (in) | 43 |
| Lifting height | (in) | 177 |
| Free lifting height | (in) | 4 |
| Lowered mast height | (in) | 79.6 |
| Mast/Fork carriage tilt forward/backward | (°) | 2/5 |
| Overall length | (in) | 106.6 |
| Overall width | (in) | 36 |
| Fork size, Thick/Width/Length | (in) | 1.4/4/45.3 |
| Fork adjust width | (in) | 8.7-29 |
| Turning radius | (in) | 53 |
| Max.gradient performance, laden/unladen | (%) | 6/8 |
| Lift speed, laden/unladen | (in/s) | 4/5.5 |
| Lowering speed, laden/unladen | (in/s) | 5.3/4.7 |
| Charger | | 24V/50 |
| Driving Motor | | AC 24V/2.0kw |
| Lifting Motor | | 24V/2.5kw |
| Battery voltage | | 24V/400AH (Side) |
| Service Weight | (lbs) | 5400 |

The EKKO EK15A 3 Wheel Electric Forklift is designed for use for small aisles, limited spaces and budget. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3300lbs.
- Raised Height 177" (14.75ft)
- Adjustable Forks 8.7-29"
- Fork Length 45.3"
- EPS (Electronic Power Steering)
- ZAPI Controller
- 24V AC Drive Motor
- 24V Lift Motor
- Battery 24V/400Ah
- Solid Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- Charger 24V/50Ah
- 3 Year Limited Warranty

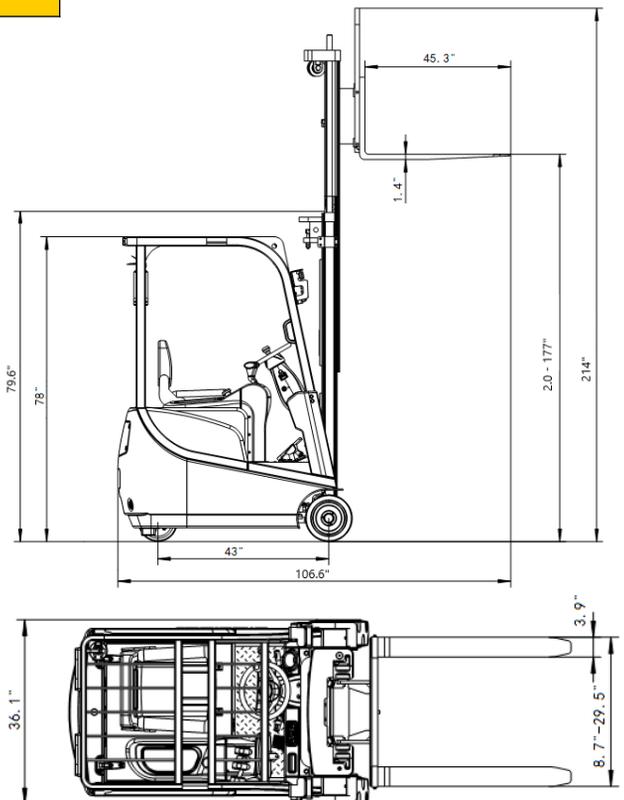


3 Wheel Electric Forklift

| Model | | EK13A |
|--|--------|------------------|
| Lift | | Electric |
| Drive | | Electric |
| Load capacity | (lbs) | 3300 |
| Load center distance | (in) | 24 |
| Wheel base | (in) | 43 |
| Lifting height | (in) | 138 |
| Free lifting height | (in) | 4 |
| Lowered mast height | (in) | 88 |
| Mast/Fork carriage tilt forward/backward | (°) | 2/5 |
| Overall length | (in) | 105 |
| Overall width | (in) | 36 |
| Fork size, Thick/Width/Length | (in) | 1.4/4/45.2 |
| Fork adjust width | (in) | 8.7-29 |
| Turning radius | (in) | 53 |
| Max.gradient performance, laden/unladen | (%) | 6/8 |
| Lift speed, laden/unladen | (in/s) | 4/5.5 |
| Lowering speed, laden/unladen | (in/s) | 5.3/4.7 |
| Charger | | 24V/50 |
| Driving Motor | | AC 24V/2.0kw |
| Lifting Motor | | 24V/2.5kw |
| Battery voltage | | 24V/350AH (Side) |
| Service Weight | (lbs) | 5200 |

The EKKO EK13A 3 Wheel Electric Forklift is designed for use for small aisles, limited spaces and budget. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3300lbs.
- Raised Height 138" (11.5ft)
- Adjustable Forks 8.7-29"
- Fork Length 45.2"
- EPS (Electronic Power Steering)
- ZAPI Controller
- 24V AC Drive Motor
- 24V Lift Motor
- Battery 24V/350Ah
- Solid Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- Charger 24V/50Ah
- 3 Year Limited Warranty

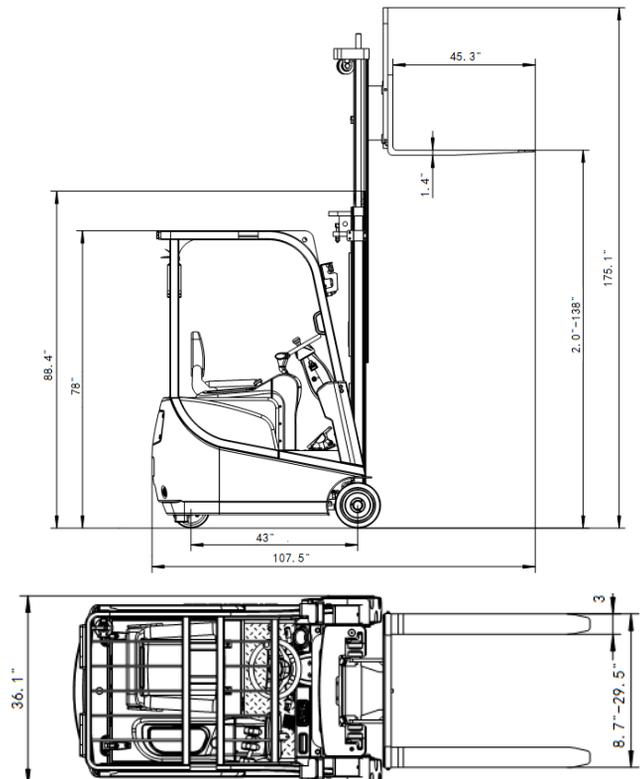

EH15TH Walkie Reach Truck




| Model | | EH15TH |
|-------------------------------|-------|--------------|
| Lift | | Electric |
| Drive | | Electric |
| Load capacity | (lbs) | 3300 |
| Load center distance | (in) | 24 |
| Lifting height | (in) | 216 |
| Lowered mast height | (in) | 93.3 |
| Overall length | (in) | 111.6 |
| Overall width | (in) | 41 |
| Fork size, Thick/Width/Length | (in) | 1.4/4/45.2 |
| Fork adjust width | (in) | 8.7-28 |
| Reach Distance | (in) | 19.7 |
| Turning radius | (in) | 67 |
| Charger | | 24V/30A |
| Driving Motor | | AC 24V/1.5kw |
| Steering Motor | | 24/0.2kw |
| Lifting Motor | | 24V/3kw |
| Battery voltage | | 24V/400AH |
| Service Weight | (lbs) | 4915 |

The EKKO EH15TH Moving Mast Walkie Reach Truck is designed with the combination of the versatility of forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3300lbs.
- Raised Height 216" (18ft)
- Reach Distance of 19.7"
- Adjustable Forks 8.7-29.7"
- Fork Length 45.2"
- Curtis Instrument Controllers
- EPS (Electronic Power Steering)
- 24V AC Drive Motor
- 24V Lift Motor
- Battery 24V/400Ah
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- Charger
- 3 Year Limited Warranty

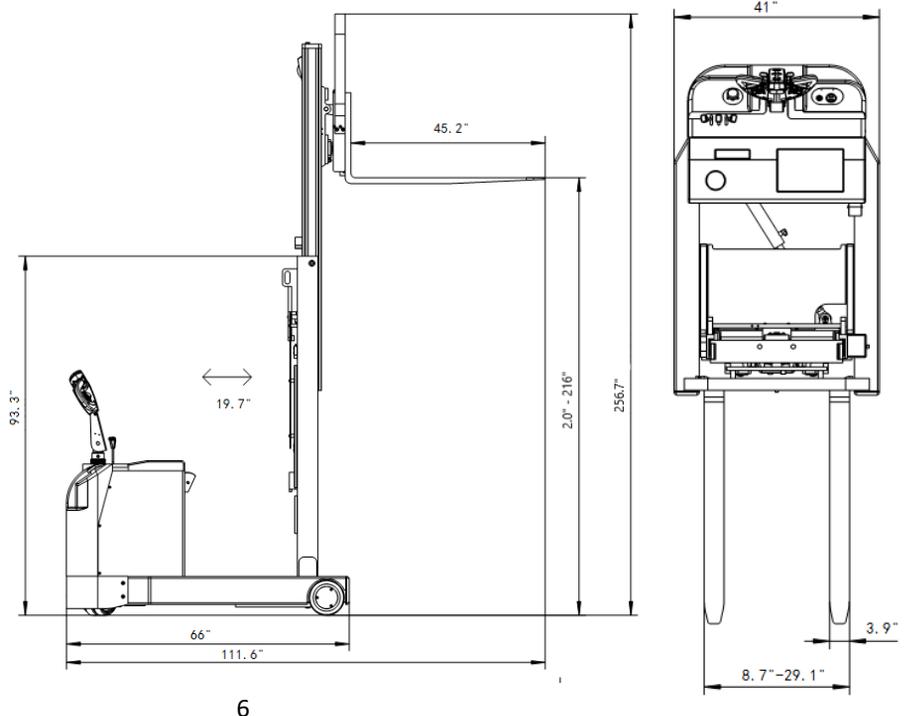

EH15T Walkie Reach Truck




| Model | | EH15T |
|-------------------------------|-------|--------------|
| Lift | | Electric |
| Drive | | Electric |
| Load capacity | (lbs) | 3300 |
| Load center distance | (in) | 24 |
| Lifting height | (in) | 138 |
| Lowered mast height | (in) | 82 |
| Overall length | (in) | 111.6 |
| Overall width | (in) | 41 |
| Fork size, Thick/Width/Length | (in) | 1.4/4/45.2 |
| Fork adjust width | (in) | 8.7-28 |
| Reach Distance | (in) | 19.7 |
| Turning radius | (in) | 67 |
| Charger | | 24V/30A |
| Driving Motor | | AC 24V/1.5kw |
| Steering Motor | | 24/0.2kw |
| Lifting Motor | | 24V/3kw |
| Battery voltage | | 24V/270AH |
| Service Weight | (lbs) | 4200 |

The EKKO EH15T Moving Mast Walkie Reach Truck is designed with the combination of the versatility of forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3300lbs.
- Raised Height 138" (11.5ft)
- Reach Distance of 19.7"
- Adjustable Forks 8.7-29.1"
- Fork Length 45.3"
- Curtis Instrument Controllers
- EPS (Electronic Power Steering)
- 24V AC Drive Motor
- 24V Lift Motor
- Battery 24V/270Ah
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- Charger
- 3 Year Limited Warranty


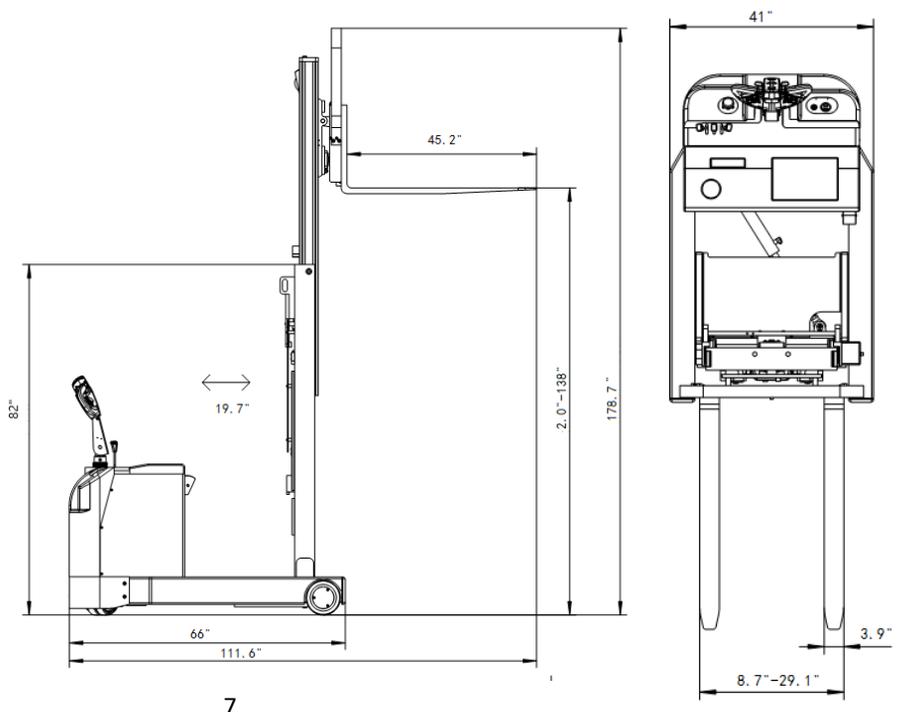


EK13-130 Counterbalance Walkie Stacker

The EKKO EK13-130 Fully Powered Counterbalance Walkie Stacker is designed with the combination of the versatility of forklift and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact and directional changes for the use of any application with confidence and assurance.

- Load Capacity 2860lbs.
- Raised Height 130" (10.8ft)
- Adjustable Forks 8.6-28.3"
- Tilt 2/5 degree
- Fork Length 45.3"
- Curtis Instrument Controller
- EPS (Electronic Power Steering)
- 24V AC Drive Motor
- 24V Lift Motor
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

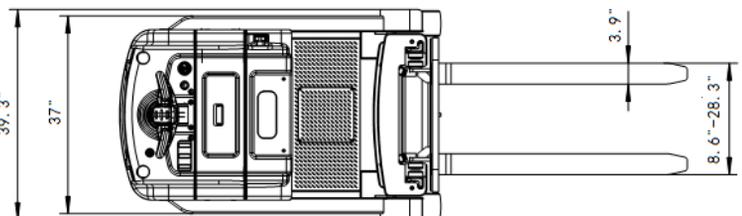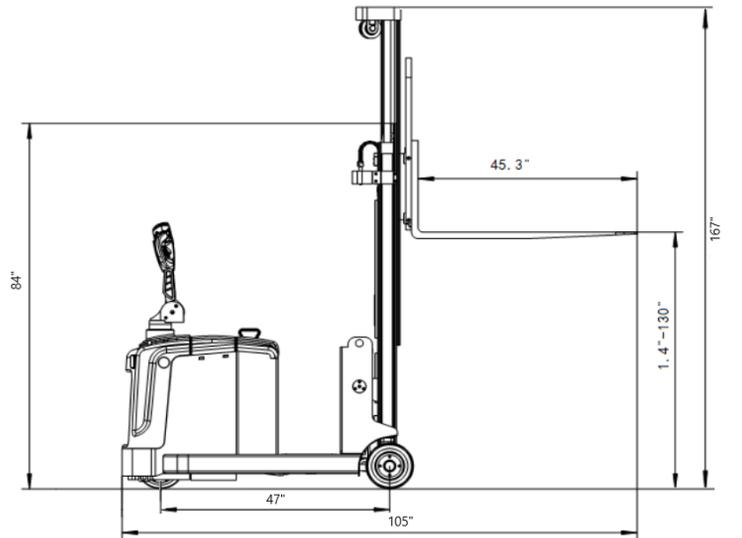


| Model | | EK13-130 |
|--|--------|------------------|
| Lift | | Electric |
| Drive | | Electric |
| Load capacity | (lbs) | 2860 |
| Load center distance | (in) | 24 |
| Wheel base | (in) | 47 |
| Lifting height | (in) | 130 |
| Free lifting height | (in) | 4 |
| Lowered mast height | (in) | 84 |
| Extended mast height | (in) | 167 |
| Mast/Fork carriage tilt forward/backward | (°) | 2/5 |
| Overall length | (in) | 105 |
| Overall width | (in) | 39 |
| Fork size, Thick/Width/Length | (in) | 1.4/4/45.3 |
| Fork adjust width | (in) | 8.6-28.3 |
| Turning radius | (in) | 57 |
| Max.gradient performance, laden/unladen | (%) | 6/10 |
| Lift speed, laden/unladen | (in/s) | 4/5.1 |
| Lowering speed, laden/unladen | (in/s) | 5.3/4.7 |
| Charger | | 24V/30 |
| Driving Motor | | AC 24V/2.0kw |
| Lifting Motor | | 24V/2.5kw |
| Steering Motor | | 24/0.2kw |
| Battery voltage | | 24V/210AH (Side) |
| Service Weight | (lbs) | 3750 |

EK13 Counterbalance Walkie Stacker

The EKKO EK13 Fully Powered Counterbalance Walkie Stacker is designed with the combination of the versatility of forklift and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and Components with durable quality drives to withstand any terrain, usage, impact and directional changes for the use of any application with confidence and assurance.

- Load Capacity 2860lbs.
- Raised Height 118" (9.83ft)
- Adjustable Forks 8.6-28.3"
- Tilt 2/5 degree
- Fork Length 45.3"
- Curtis Instrument Controller
- EPS (Electronic Power Steering)
- 24V AC Drive Motor
- 24V Lift Motor
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

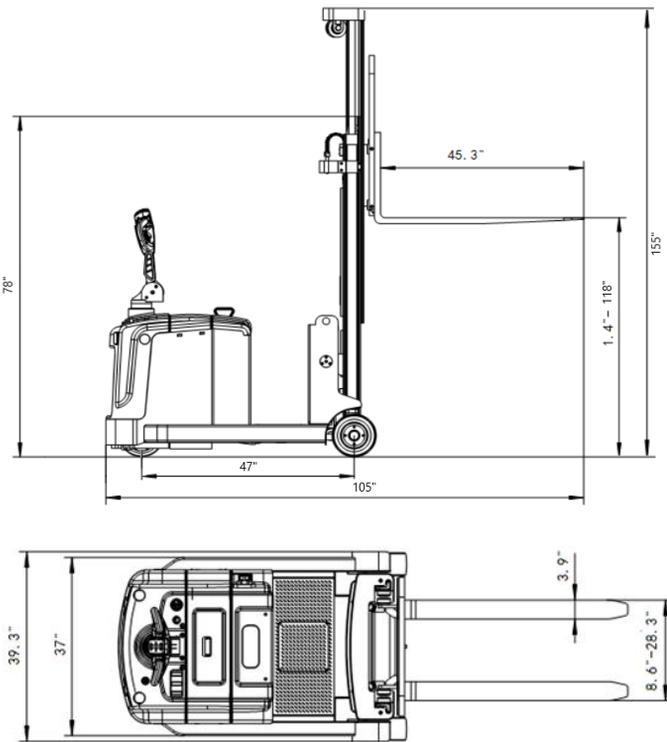

| Model | | EK13 |
|--|--------|------------------|
| Lift | | Electric |
| Drive | | Electric |
| Load capacity | (lbs) | 2860 |
| Load center distance | (in) | 24 |
| Wheel base | (in) | 47 |
| Lifting height | (in) | 118 |
| Free lifting height | (in) | 4 |
| Lowered mast height | (in) | 78 |
| Extended mast height | (in) | 155 |
| Mast/Fork carriage tilt forward/backward | (°) | 2/5 |
| Overall length | (in) | 105 |
| Overall width | (in) | 39 |
| Fork size, Thick/Width/Length | (in) | 1.4/4/45.3 |
| Fork adjust width | (in) | 8.6-28.3 |
| Turning radius | (in) | 57 |
| Max.gradient performance, laden/unladen | (%) | 6/10 |
| Lift speed, laden/unladen | (in/s) | 4/5.1 |
| Lowering speed, laden/unladen | (in/s) | 5.3/4.7 |
| Charger | | 24V/30 |
| Driving Motor | | AC 24V/2.0kw |
| Lifting Motor | | 24V/2.5kw |
| Steering Motor | | 24/0.2kw |
| Battery voltage | | 24V/210AH (Side) |
| Service Weight | (lbs) | 3652 |

EK07S Counterbalance Walkie Stacker




| Model | | EK07S |
|----------------------------------|-------|---------------|
| Lift | | Electric |
| Drive | | Electric |
| Load capacity | (lbs) | 1550 |
| Load center distance | (in) | 20 |
| Lifting height | (in) | 118 |
| Lowered mast height | (in) | 81.1 |
| Overall length | (in) | 84.7 |
| Overall width | (in) | 34.5 |
| Fork size, Thick/Width/Length | (in) | 1.4/2.9/42 |
| Fork adjust width | (in) | 8.3-25.2 |
| Turning radius | (in) | 51 |
| Charger | | 24V/20A |
| Driving Motor | | AC 24V/0.75kw |
| Lifting Motor | | 24V/1.5kw |
| Battery voltage | | 24V/120AH |
| Service Weight | (lbs) | 2090 |

The EKKO EK07S Fully Powered Counterbalance Walkie Stacker is designed with the combination of the versatility of forklift and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact and directional changes for the use of any application with confidence and assurance.

- Load Capacity 1550lbs.
- Raised Height 118" (9.83ft)
- Adjustable Forks 8.3-25.2"
- Fork Length 42"
- ZAPI Controller
- 24V AC Drive Motor
- 24V Lift Motor
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

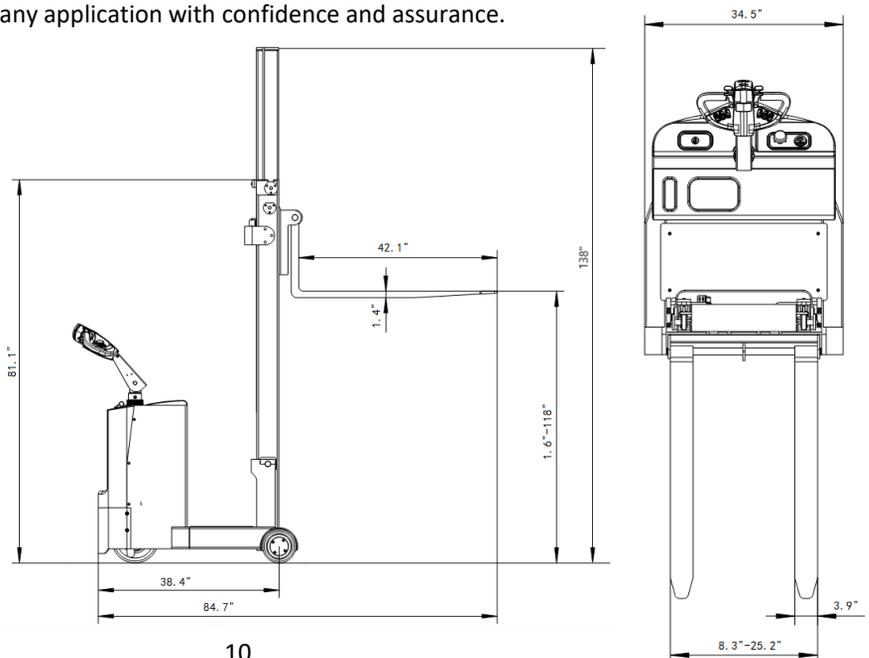

10

EB20E Full Powered Walkie Stacker


The EKKO EB20E Electric Straddle Stacker is designed with the combination of the versatility of forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4400lbs.
- Raised Height 177"
- Adjustable Forks 9.8-31.5"
- Adjustable Legs 45.5-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V AC Drive Motor
- 24V Lift Motor
- Triple Mast
- Battery 24V/210Ah
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty



| Model | | EB20E |
|------------------------------|-------|---|
| Load capacity | (lb) | 4400 |
| The max. lifting height | (in) | 177 |
| Load center distance | (in) | 24 |
| Fork length | (in) | 45.3 |
| Single fork width | (in) | 4.7 |
| Overall fork width | (in) | 9.8-31.5 |
| Lowered fork height | (in) | 3 |
| Fixed leg length | (in) | 42 |
| Adjustable legs | (in) | 45.5-59.1 |
| Turning radius | (in) | 60 |
| Overall length | (in) | 82 |
| Max Overall width | (in) | 61 |
| Extended mast height | (in) | 198 |
| Lowered mast height | (in) | 83.6 |
| Battery voltage (dimensions) | (in) | 24/210AH |
| The charger | V/A | 24V/30A |
| Lifting Motor | V/Kw | 3kw. Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s |
| Driving Motor | | 1.5kw. Driving speed: laden/unladen:4.0/4.2km/h |
| Service Weight | (lbs) | 2800 |

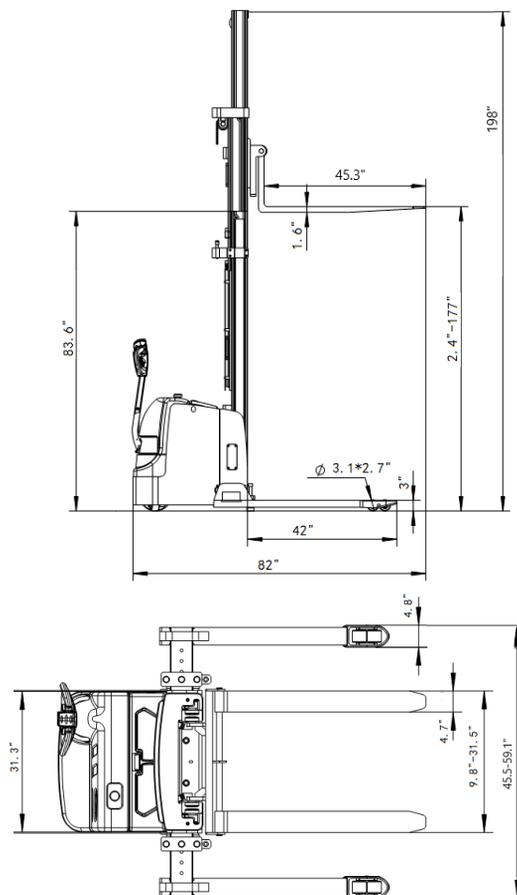

EB18E Full Powered Walkie Stacker





The EKKO EB18E Electric Straddle Stacker is designed with the combination of the versatility of forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4000lbs.
- Raised Height 138"
- Adjustable Forks 9.8-31.5"
- Adjustable Legs 45.5-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V AC Drive Motor
- 24V Lift Motor
- Battery 24V/160Ah
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

| Model | | EB18E |
|------------------------------|-------|---|
| Load capacity | (lbs) | 4000 |
| The max. lifting height | (in) | 138 |
| Load center distance | (in) | 24 |
| Fork length | (in) | 45.3 |
| Single fork width | (in) | 4.7 |
| Overall fork width | (in) | 9.8-31.5 |
| Lowered fork height | (in) | 2.35 |
| Fixed leg length | (in) | 36.5 |
| Adjustable legs | (in) | 45.5-59.1 |
| Turning radius | (in) | 60 |
| Overall length | (in) | 82 |
| Max Overall width | (in) | 61 |
| Extended mast height | (in) | 154 |
| Lowered mast height | (in) | 91.3 |
| Battery voltage (dimensions) | (in) | 2x12V/160AH |
| The charger | V/A | 24V/20A |
| Lifting Motor | V/K w | 3kw. Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s |
| Driving Motor | | 1.5kw. Driving speed: laden/unladen:4.0/4.2km/h |
| Service Weight | (lbs) | 2100 |

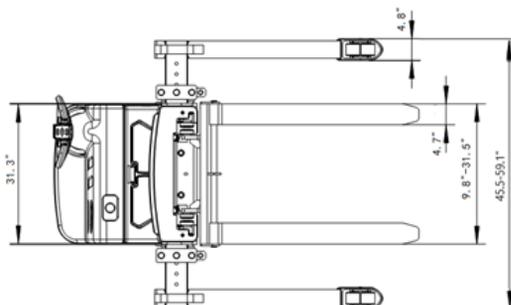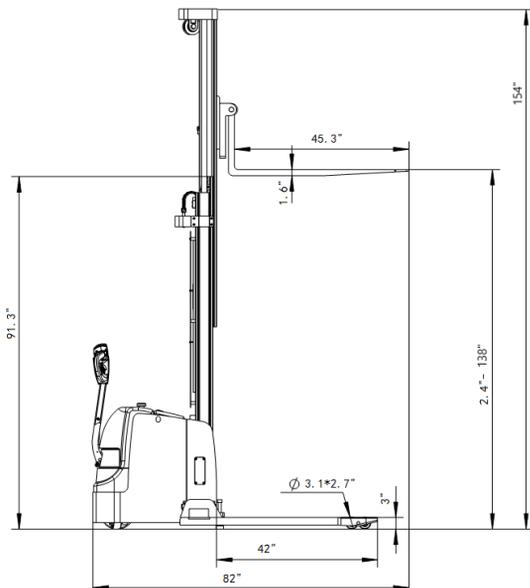


EB12E-138 Full Powered Walkie Stacker

The EKKO EB12E-138 Electric Straddle Stacker is designed with the combination of the versatility of forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact and directional changes for the use of any application with confidence and assurance.

- Load Capacity 2640lbs.
- Raised Height 138"
- Adjustable Forks 8.3-33.5"
- Adjustable Legs 45.7-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V Drive Motor
- 24V Lift Motor
- Battery 2*12V/100Ah
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

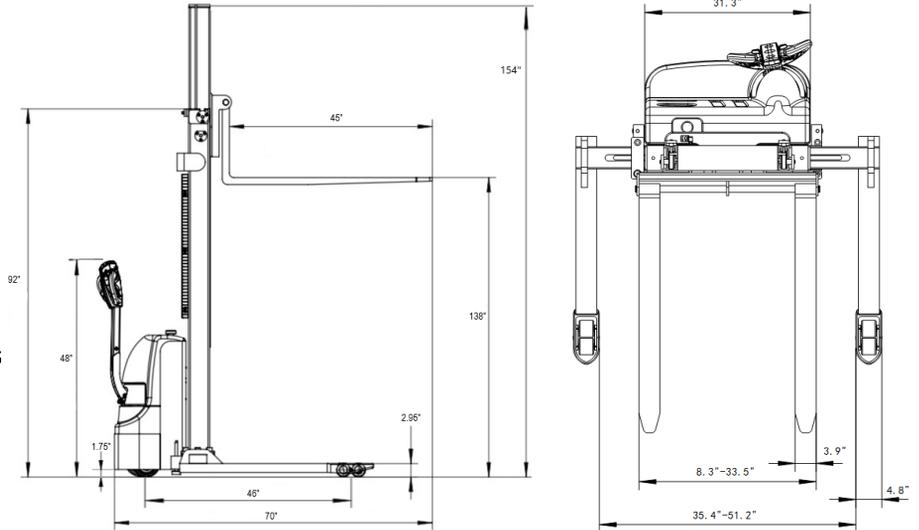

| Model | | EB12E-138 |
|------------------------------|-------|---|
| Load capacity | (lbs) | 2640 |
| The max. lifting height | (in) | 138" |
| Load center distance | (in) | 24 |
| Fork length | (in) | 45.3 |
| Single fork width | (in) | 4 |
| Overall fork width | (in) | 8.3-33.5 |
| Lowered fork height | (in) | 2.35 |
| Fixed leg length | (in) | 36.5 |
| Adjustable legs | (in) | 45.5-59.1 |
| Turning radius | (in) | 52.6 |
| Overall length | (in) | 70 |
| Max Overall width | (in) | 61 |
| Extended mast height | (in) | 154 |
| Lowered mast height | (in) | 92 |
| Battery voltage (dimensions) | (in) | 2×12V/100AH (10/6.6/8.5) |
| The charger | V/A | 24V/15A |
| Lifting Motor | V/Kw | 2.2kw. Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s |
| Driving Motor | | 0.75kw.Driving speed: laden/unladen:4.0/4.2km/h |
| Service Weight | (lbs) | 1450 |




EB12E Full Powered Walkie Stacker

The EKKO EB12E Electric Straddle Stacker is designed with the combination of the versatility of forklift, reach truck and a walkie stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact and directional changes for the use of any application with confidence and assurance.

- Load Capacity 2640lbs.
- Raised Height 119.4"
- Adjustable Forks 8.3-33.5"
- Adjustable Legs 45.7-59.1"
- Fork Length 45.3"
- Curtis Instrument Controller
- 24V Drive Motor
- 24V Lift Motor
- Battery 2*12V/100Ah
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

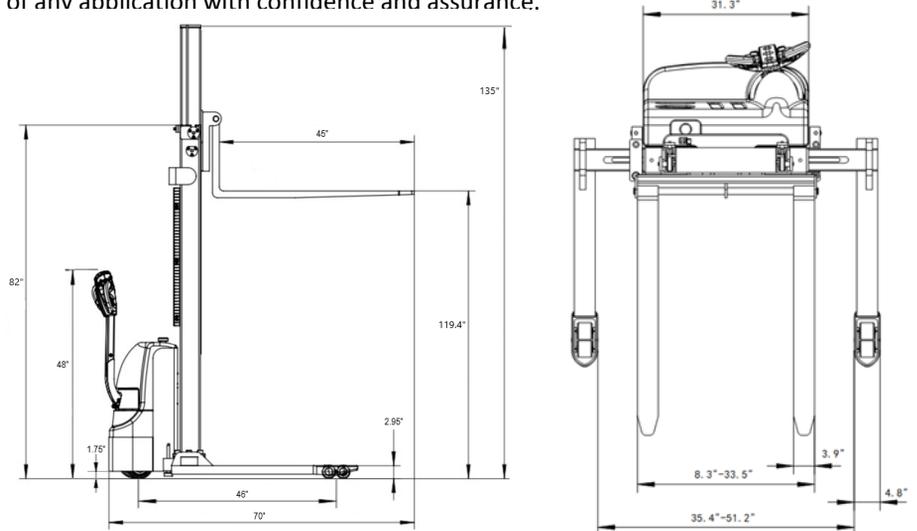

| Model | | EB12E |
|------------------------------|-------|---|
| Load capacity | (lbs) | 2640 |
| The max. lifting height | (in) | 119.4" |
| Load center distance | (in) | 24 |
| Fork length | (in) | 45.3 |
| Single fork width | (in) | 4 |
| Overall fork width | (in) | 8.3-33.5 |
| Lowered fork height | (in) | 2.35 |
| Fixed leg length | (in) | 36.5 |
| Adjustable legs | (in) | 45.5-59.1 |
| Turning radius | (in) | 52.6 |
| Overall length | (in) | 70 |
| Max Overall width | (in) | 61 |
| Extended mast height | (in) | 135 |
| Lowered mast height | (in) | 82 |
| Battery voltage (dimensions) | (in) | 2 × 12V/100AH (10/6.6/8.5) |
| The charger | V/A | 24V/15A |
| Lifting Motor | V/Kw | 2.2kw. Lift speed, laden/unladen:92/136mm/s Lowering speed, laden/unladen:112/98mm/s |
| Driving Motor | | 0.75kw. Driving speed: laden/unladen:4.0/4.2km/h |
| Service Weight | (lbs) | 1375 |



EA15B Semi-Electric Straddle Stacker




| Model | | EA15B |
|-------------------------|-------|---------------|
| Load Capacity | (lbs) | 3300 |
| Lifting height Max. | (in) | 119.4 |
| Load center distance | (in) | 22 |
| Fork length | (in) | 45.3 |
| Single fork width | (in) | 3.9 |
| Overall fork width | (in) | 8-33.4 |
| Lowered fork height | (in) | 2.4 |
| Fixed leg length | (in) | 36.4 |
| Fixed leg width, single | (in) | 3.94 |
| Adjustable legs | (in) | 43.5-59.1 |
| Turning radius | (in) | 53.2 |
| Overall length | (in) | 70 |
| Overall width max | (in) | 59 |
| Extended mast height | (in) | 140.5 |
| Lowered mast height | (in) | 84.5 |
| Battery Voltage | (in) | 12V/120AH |
| Charger | | 12V/15A |
| Lift Motor | | DC, 12V/1.5KW |
| Service Weight | (lbs) | 1150 |

The EKKO EA15B Semi-Electric Straddle Stacker is designed with the combination of the versatility of forklift and a pallet stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3300lbs.
- Raised Height 119.4" (9.95ft)
- Adjustable Forks 8.3-33.4"
- Adjustable Legs 43.5-59.1"
- Power Lifting
- Manual Drive
- External Charger 12v 15Ah
- Battery 12v 120Ah
- Ergonomic Handle
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

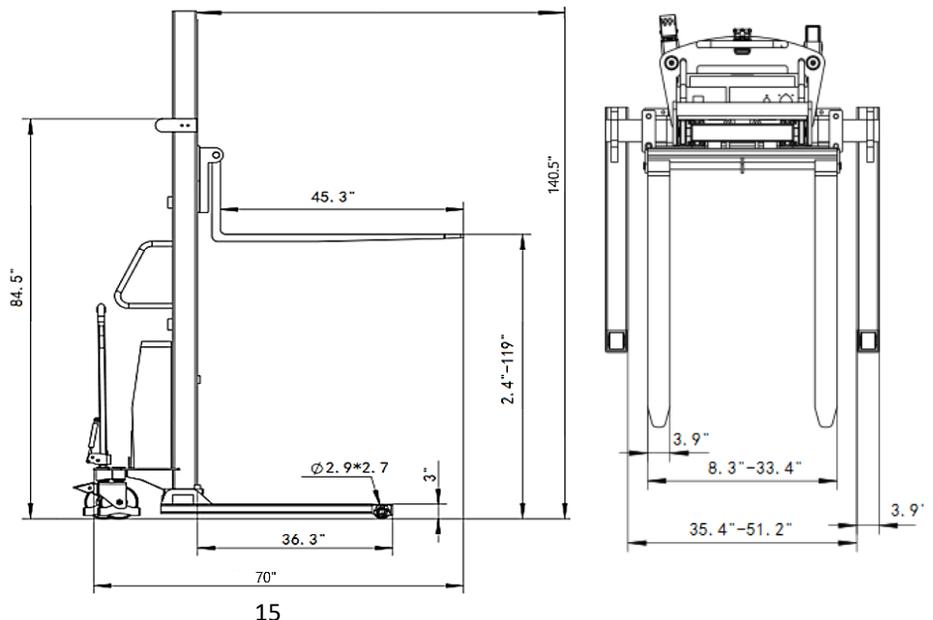

EA15A Semi-Electric Straddle Stacker



| Model | | EA15A |
|-------------------------|-------|---------------|
| Load Capacity | (lbs) | 3300 |
| Lifting height Max. | (in) | 119.4 |
| Load center distance | (in) | 22 |
| Fork length | (in) | 48 |
| Single fork width | (in) | 3.94 |
| Overall fork width | (in) | 8-32.7 |
| Lowered fork height | (in) | 2.35 |
| Fixed leg length | (in) | 36.4 |
| Fixed leg width, single | (in) | 3.94 |
| Adjustable legs | (in) | 44.5-59.1 |
| Turning radius | (in) | 53.2 |
| Overall length | (in) | 72.5 |
| Overall width max | (in) | 59 |
| Extended mast height | (in) | 140.5 |
| Lowered mast height | (in) | 84.5 |
| Battery Voltage | (in) | 12V/90AH |
| Charger | | 12V/15A |
| Lift Motor | | DC, 12V/1.5KW |
| Service Weight | (lbs) | 1190 |

The EKKO EA15A Semi-Electric Straddle Stacker is designed with the combination of the versatility of forklift and a pallet stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3300lbs.
- Raised Height 119.4" (9.95ft)
- Adjustable Forks 8.3-32.7"
- Adjustable Legs 44.5-59.1"
- Power Lifting
- Manual Drive
- Adjustable Forks
- Built-in Charger 12v 15Ah
- Battery 12v / 90Ah
- Ergonomic Handle
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty



D10 Manual Straddle Stacker



| Model | | D10 |
|-------------------------|-------|----------|
| Load Capacity | (lbs) | 2200 |
| Lifting height Max. | (in) | 63 |
| Fork length | (in) | 45.3 |
| Adjustable fork | (in) | 8.3-33.5 |
| Adjustable legs | (in) | 43.5-59 |
| Fixed leg width, single | (in) | 3.94 |
| Overall length | (in) | 67.5 |
| Overall width max | (in) | 59 |
| Lowered fork height | (in) | 2.75 |
| Lowered Mast Ht. | (in) | 81 |
| Service Weight | (lbs) | 660 |

The EKKO D10 Manual Straddle Stacker is designed with the combination of the versatility of forklift and a pallet stacker. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact and directional changes for the use of any application with confidence and assurance.

- Load Capacity 2200lbs.
- Raised Height 63" (5.25ft)
- Adjustable Fork 8.3-33.5"
- Adjustable Legs 43.5-59"
- Manual Lift
- Manual Drive
- Adjustable Straddle Legs
- Adjustable Forks
- Polyurethane Wheels
- Ergonomic Handle
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty




EKKO EP25E Walkie Pallet Jack



The EKKO EP25E Electric Walkie Pallet Jack is designed with the versatility of a pallet jack with full power lifting and driving capabilities. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact and directional changes for the use of any application with confidence and assurance.

- Load Capacity 5500lbs.
- Fork Size 27x48
- Curtis Instrument Controller
- Raised Height 7.9"
- Lowered Height 3.3"
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

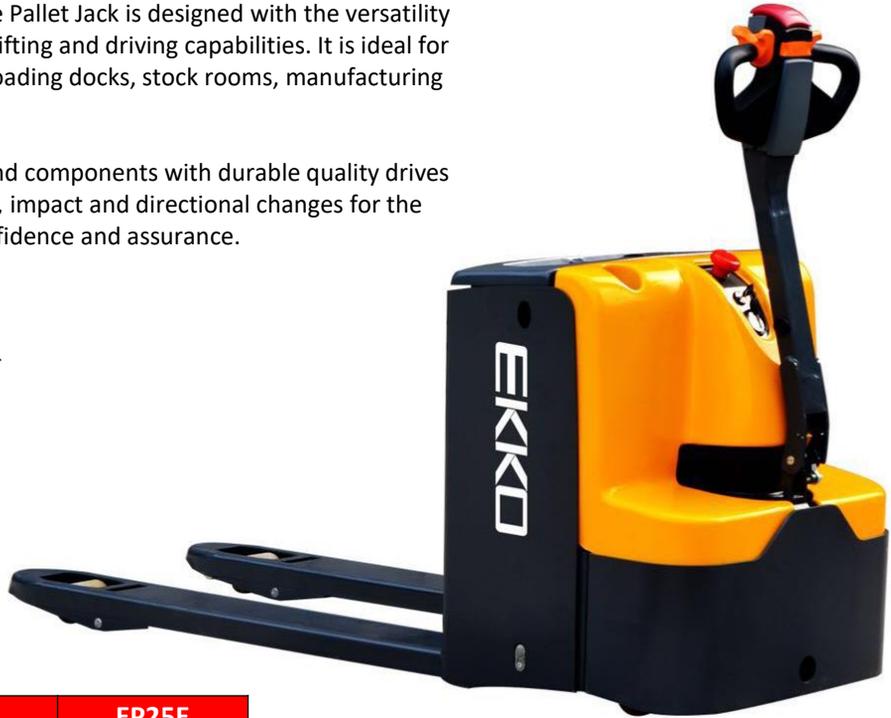

| Model | | EP25E |
|--|---------------|------------------------|
| Lift | | Electric |
| Drive | | Electric |
| Load capacity | (lbs) | 5500 |
| Load center | (in) | 24 |
| Wheel base | (in) | 53 |
| Lowered fork height | (in) | 3.33 |
| Lifting height | (in) | 7.9 |
| Overall length | (in) | 71.2 |
| Overall width | (in) | 27.5 |
| Fork size | s/e/l (in) | 2/6/48 |
| Outside distance of fork | (in) | 27 |
| Turning radius | (in) | 60 |
| Lifting speed, laden/unladen | (in/s) | 0.8/1.1 |
| Lowering speed, laden/unladen | (in/s) | 1.5/1.5 |
| Max gradient performance laden/unladen | (%) | 8/15 |
| Brake type | | electromagnetic |
| Drive motor | (kW) | 1.3 |
| Lift motor | (kW) | 0.8 |
| Charger | (V/A) | 24/30A |
| Battery voltage/rated capacity | (V/Ah) | 24/240 |
| Type of the drive motor | | AC Motor speed control |
| Noise level at operator seat | (dB(A)) | 68 |
| Service weight (with battery) | (lbs) | 1190 |

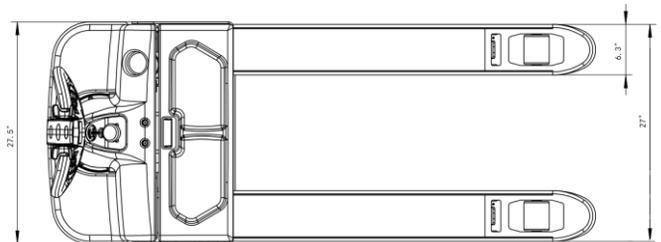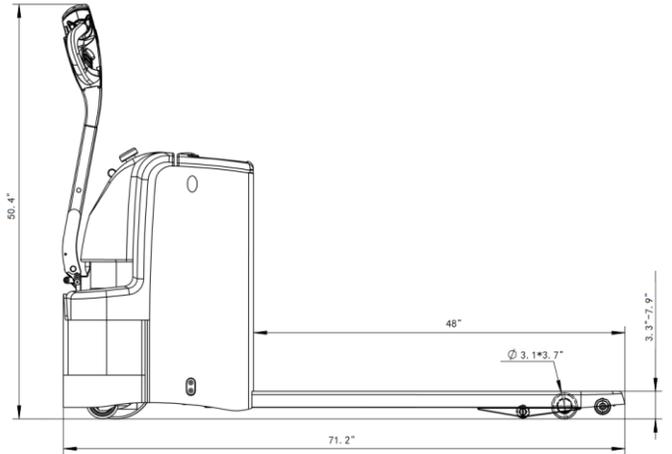


EKKO EP20E Walkie Pallet Jack

The EKKO EP20E Electric Walkie Pallet Jack is designed with the versatility of a pallet jack with full power lifting and driving capabilities. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4400lbs.
- Fork Size 27x48
- Curtis Instrument Controller
- Raised Height 7.9"
- Lowered Height 3.3"
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

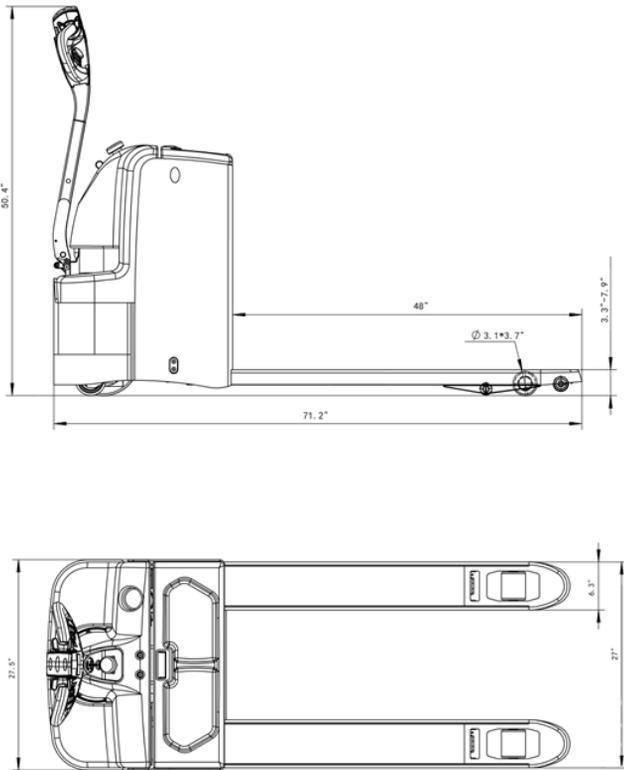


| Model | | EP20E |
|--|---------------|------------------------|
| Lift | | Electric |
| Drive | | Electric |
| Load capacity | (lbs) | 4400 |
| Load center | (in) | 24 |
| Wheel base | (in) | 53 |
| Lowered fork height | (in) | 3.3 |
| Lifting height | (in) | 7.9 |
| Overall length | (in) | 71.2 |
| Overall width | (in) | 28 |
| Fork size | s/e/l (in) | 2/6/48 |
| Outside distance of fork | (in) | 27 |
| Turning radius | (in) | 60 |
| Lifting speed, laden/unladen | (in/s) | 0.8/1.1 |
| Lowering speed, laden/unladen | (in/s) | 1.5/1.5 |
| Max gradient performance laden/unladen | (%) | 8/15 |
| Brake type | | electromagnetic |
| Drive motor | (kW) | 1.3 |
| Lift motor | (kW) | 0.8 |
| Charger | (V/A) | 24V/15A |
| Batter voltage/rated capacity | (V/Ah) | 24/160 |
| Type of the drive motor | | AC Motor speed control |
| Noise level at operator seat | (dB(A)) | 68 |
| Service weight (with battery) | (lbs) | 1020 |

EKKO EP20D Walkie Pallet Jack



The EKKO EP20D Electric Walkie Pallet Jack is designed with the versatility of a pallet jack with full power lifting and driving capabilities. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4400lbs.
- Fork Size 27x45.3
- Raised Height 7.7"
- Lowered Height 3.3"
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- Built-in Charger
- 3 Year Limited Warranty

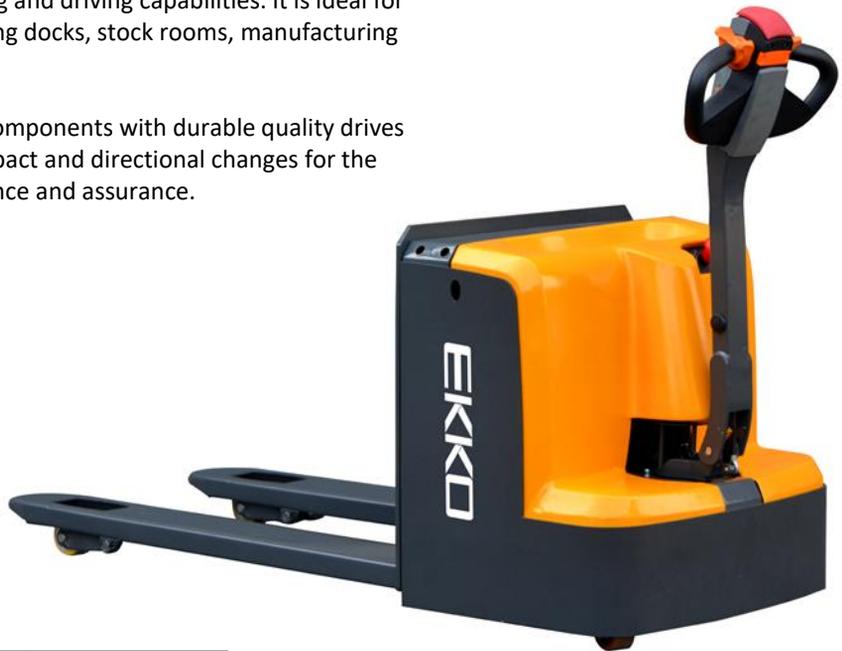

| Model | | EP20D |
|--|---------------|------------------------|
| Lift | | Electric |
| Drive | | Electric |
| Load capacity | (lbs) | 4400 |
| Load center | (in) | 24 |
| Wheel base | (in) | 53 |
| Lowered fork height | (in) | 3.3 |
| Lifting height | (in) | 7.7 |
| Overall length | (in) | 67.2 |
| Overall width | (in) | 27.5 |
| Fork size | s/e/l (in) | 2/6/45.3 |
| Outside distance of fork | (in) | 27 |
| Turning radius | (in) | 55 |
| Lifting speed, laden/unladen | (in/s) | 0.8/1.1 |
| Lowering speed, laden/unladen | (in/s) | 1.5/1.5 |
| Max gradient performance laden/unladen | (%) | 8/15 |
| Brake type | | electromagnetic |
| Drive motor | (kW) | 0.75 |
| Lift motor | (kW) | 0.8 |
| Batter voltage/rated capacity | (V/Ah) | 24/100 |
| Type of the drive motor | | DC Motor speed control |
| Noise level at operator seat | (dB(A)) | 68 |
| Service weight (with battery) | (lbs) | 880 |

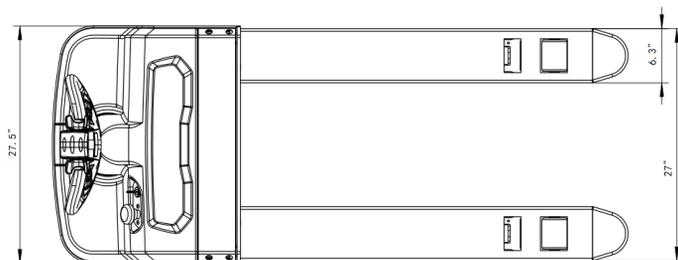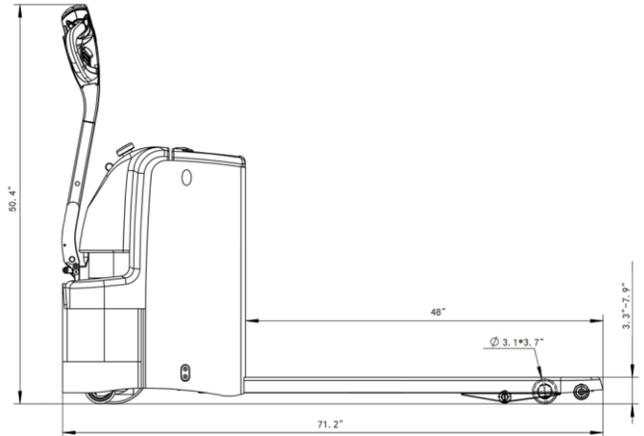

EKKO EP18D Walkie Pallet Jack



The EKKO EP18D Electric Walkie Pallet Jack is designed with the versatility of a pallet jack with full power lifting and driving capabilities. It is ideal for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable quality drives to withstand any terrain, usage, impact and directional changes for the use of any application with confidence and assurance.

- Load Capacity 3300lbs.
- Fork Size 27x45.3
- Raised Height 7.7"
- Lowered Height 3.3"
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- Built-in Charger
- 3 Year Limited Warranty



| Model | | EP18D |
|--|---------------|------------------------|
| Lift | | Electric |
| Drive | | Electric |
| Load capacity | (lbs) | 3300 |
| Load center | (in) | 24 |
| Wheel base | (in) | 53 |
| Lowered fork height | (in) | 3.3 |
| Lifting height | (in) | 7.7 |
| Overall length | (in) | 67.2 |
| Overall width | (in) | 27.5 |
| Fork size | s/e/l (in) | 2/6/45.3 |
| Outside distance of fork | (in) | 27 |
| Turning radius | (in) | 55 |
| Lifting speed, laden/unladen | (in/s) | 0.8/1.1 |
| Lowering speed, laden/unladen | (in/s) | 1.5/1.5 |
| Max gradient performance laden/unladen | (%) | 8/15 |
| Brake type | | electromagnetic |
| Drive motor | (kW) | 0.75 |
| Lift motor | (kW) | 0.8 |
| Batter voltage/rated capacity | (V/Ah) | 24/65 |
| Type of the drive motor | | DC Motor speed control |
| Noise level at operator seat | (dB(A)) | 68 |
| Service weight (with battery) | (lbs) | 850 |

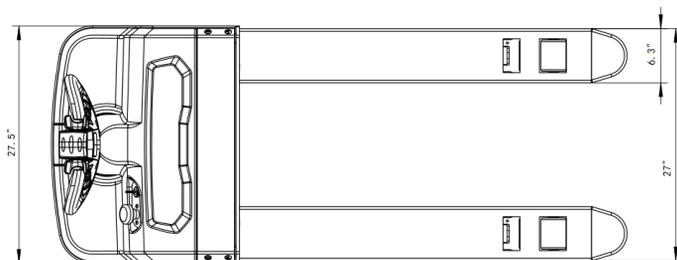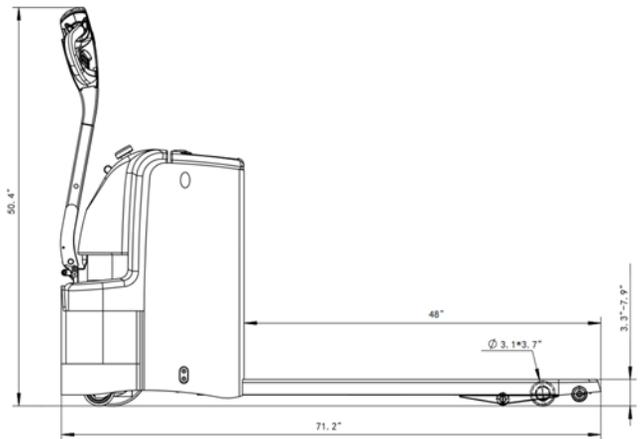

EKKO A25 Manual Pallet Jack





The EKKO A25 Manual Pallet Jack is designed with quality materials, components and workmanship. Every product is robotically welded, powder coated and is reliable for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable hydraulic pumps with quality load wheels to withstand any terrain, usage, impact and directional changes for the use of any application with confidence and assurance.

- Load Capacity 5500lbs.
- Fork Size 27x48
- Raised Height 7.5"
- Lowered Height 2.95"
- Galvanized Hydraulic Pumps
- Polyurethane Wheels
- Ergonomic Handles
- Powder Coated
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

| Model | | A25 |
|-------------------------|-------|------|
| Load Capacity | (lbs) | 5500 |
| Lifting height Max. | (in) | 7.5 |
| Fork length | (in) | 48 |
| Fork width | (in) | 27 |
| Fixed leg width, single | (in) | 6.3 |
| Overall length | (in) | 63" |
| Overall width max | (in) | 27 |
| Lowered fork height | (in) | 2.95 |
| Service Weight | (lbs) | 160 |

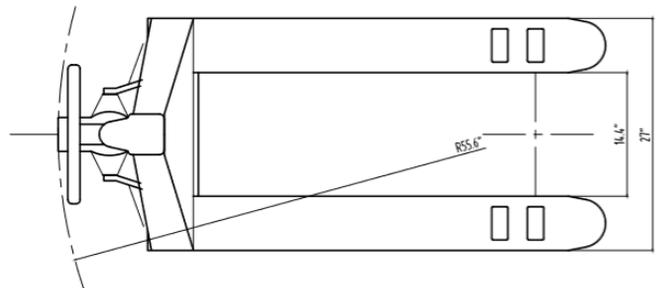
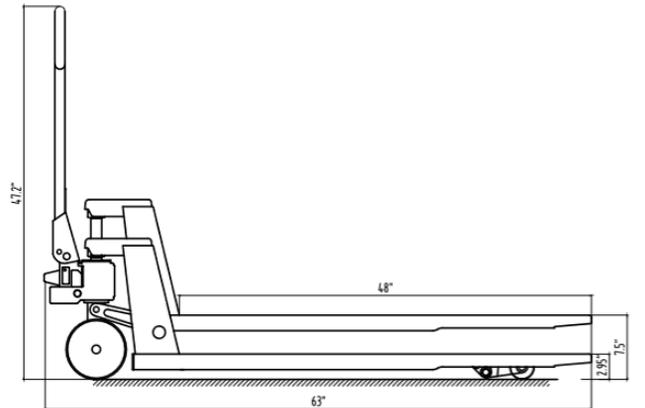


EKKO A20 Manual Pallet Jack

The EKKO A20 Manual Pallet Jack is designed with quality materials, components and workmanship. Every product is robotically welded, powder coated and is reliable for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components with durable hydraulic pumps with quality load wheels to withstand any terrain, usage, impact and directional changes for the use of any application with confidence and assurance.

- Load Capacity 4400lbs.
- Fork Size 27x48
- Raised Height 7.5"
- Lowered Height 2.95"
- Galvanized Hydraulic Pumps
- Polyurethane Wheels
- Ergonomic Handles
- Powder Coated
- Steel Construction
- Robotic Welding
- 3 Year Limited Warranty

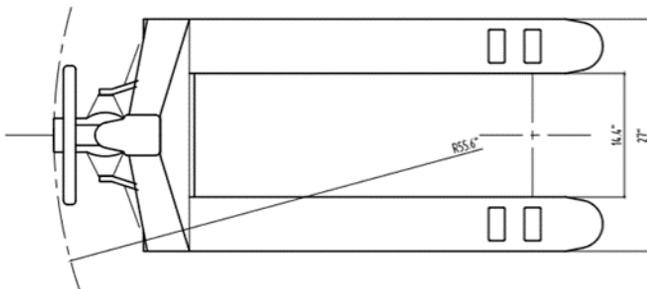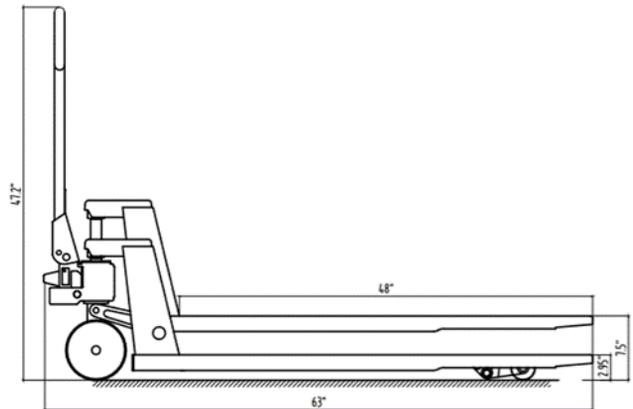

| Model | | A20 |
|-------------------------|-------|-------|
| Load Capacity | (lbs) | 4400 |
| Lifting height Max. | (in) | 7.5 |
| Fork length | (in) | 48 |
| Fork width | (in) | 27 |
| Fixed leg width, single | (in) | 6.3 |
| Overall length | (in) | 63 |
| Overall width max | (in) | 22/27 |
| Lowered fork height | (in) | 2.95 |
| Service Weight | (lbs) | 130 |

EKKO T15 Scissor Lift Table Cart

The EKKO T15 Scissor Lift Table Cart is a compact cart to make lifting, transporting loads, order-picking, and moving products with ease. An ergonomic solution to lifting, positioning and transporting goods.

Our scissor carts are made of heavy duty steel and constructed to hold up for longevity. Two polyurethane front casters and two rear swivel casters with built-in hand brakes and foot pump.

- Load Capacity 330lbs
- Raised Height 28.3"
- Lowered Height 8.3"
- Size Length 27.5" x Width 17.7"
- Polyurethane Casters
- Hand Brake
- Foot Brake
- Steel construction
- Robotic Welding
- 3 Years Limited Warranty



| Model | | T15 |
|---------------------|-------|-------|
| Load Capacity | (lbs) | 330 |
| Lifting height Max. | (in) | 28.3 |
| Length | (in) | 27.5 |
| Width | (in) | 17.1 |
| Lowest height | (in) | 8.3 |
| Handle height | (in) | 31.89 |
| Service Weight | (lbs) | 88 |

EKKO T50 Heavy Duty Scissor Lift Table Cart

The EKKO T50 Heavy Duty Scissor Lift Table Cart is a compact cart to make lifting, transporting loads, order-picking, and moving products with ease. An ergonomic solution to lifting, positioning and transporting goods.

Our scissor carts are made of heavy duty steel and constructed to hold up for longevity. Two polyurethane front casters and two rear swivel casters with built-in hand brakes and foot pump.



- Load Capacity 1100lbs
- Raised Height 35.4"
- Lowered Height 11"
- Size Length 32.1" x Width 19.7"
- Polyurethane Casters
- Hand Brake
- Foot Brake
- Caster Guards
- Steel construction
- Robotic Welding
- 3 Years Limited Warranty

| Model | | T50 |
|---------------------|-------|-------|
| Load Capacity | (lbs) | 1100 |
| Lifting height Max. | (in) | 35.4 |
| Length | (in) | 32.1 |
| Width | (in) | 19.7 |
| Lowest height | (in) | 11 |
| Handle height | (in) | 31.89 |
| Service Weight | (lbs) | 180 |

EKKO T35 Dual Scissor Lift Table Cart

The EKKO T35 Dual Scissor Lift Table Cart is a compact cart to make lifting, transporting loads, order-picking, and moving products with ease. An ergonomic solution to lifting, positioning and transporting goods.

Our scissor carts are made of heavy duty steel and constructed to hold up for longevity. Two polyurethane front casters and two rear swivel casters with built-in hand brakes and foot pump.

- Load Capacity 770lbs
- Raised Height 51.2"
- Lowered Height 14"
- Size Length 35.6" x Width 19.7"
- Polyurethane Casters
- Hand Brake
- Foot Brake
- Caster Guards
- Steel construction
- Robotic Welding
- 3 Years Limited Warranty



| Model | | T35 |
|---------------------|-------|------|
| Load Capacity | (lb) | 770 |
| Lifting height Max. | (in) | 51.2 |
| Length | (in) | 35.6 |
| Width | (in) | 19.7 |
| Lowest height | (in) | 14 |
| Handle height | (in) | 38.2 |
| Service Weight | (lbs) | 234 |

EKKO EG30 Tow Tractor



The EKKO EG30 Tow Tractor is designed for tugging and pulling applications made with quality materials, components and workmanship. Every product is robotically welded, powder coated and is reliable for loading and unloading trucks, loading docks, stock rooms, manufacturing floors and warehousing.

Made from high quality steel and components to withstand any terrain, usage, impact and directional changes for the use of any application with confidence and assurance.

- Tow Capacity 6600lbs.
- Curtis Instrument Controller
- AC Drive 1.3
- Standing Drive
- Polyurethane Wheels
- Ergonomic Handle and Controls
- Steel Construction
- Robotic Welding
- 24V/210Ah
- 3 Year Limited Warranty

| Model | | EG30 |
|--|---------|------------------------|
| Power unit | | Electric |
| Operation | | Standing |
| Tow Weight | (lbs) | 6600 |
| Overall length | (in) | 50 |
| Overall width | (in) | 32 |
| Overall Height | (in) | 53 |
| Turning radius | (in) | 45 |
| Max gradient performance laden/unladen | (%) | 6/10 |
| Drive motor | (kW) | AC1.3 |
| Batter voltage/rated capacity | (V/Ah) | 24/210 |
| Type of the drive motor | | AC Motor speed control |
| Noise level at operator seat | (dB(A)) | 68 |
| Service weight (w/ battery) | (lbs) | 1433 |

EKKO[®]

Material Handling Equipment



EKKO Material Handling Equipment Mfg. Inc.

1761 W. Holt Ave.

Pomona, CA. 91768

T: (877) 232-6517

O: (909) 222-6529

F: (909) 222-6861

info@ekkolifts.com

www.ekkolifts.com